

Also registered with



OUTDOOR Digital Signage




capitalinfoart®
www.capitalsignage.com

SPECIAL DISPLAYS
Creating Better Visions

Product Parameters

Model	FC42P01	FC47P01	FC55P01	FC65P01	FC70P01
High brightness screen					
Size	42"(930*523mm)	47"(1039 *584mm)	55"(1209 *680mm)	65"(1428 *803mm)	70"(1595*891mm)
Display Ratio	16:9	16:9	16:9	16:9	16:9
Resolution	1920*1080 Full HD	1920*1080 HD	1920*1080 Full HD	1920*1080 Full HD	1920*1080 Full HD
Brightness	1500 cd/m ²	1500 cd/m ²	2000 cd/m ²	2000 cd/m ²	2000 cd/m ²
Contrast Ratio	3000:1	3000:1	3000:1	3000:1	3000:1
Viewing Angle	178 ° horizontal / 178 ° vertical	178 ° horizontal / 178 ° vertical	178 ° horizontal / 178 ° vertical	178 ° horizontal / 178 ° vertical	178 ° horizontal / 178 ° vertical
Operation Parameters					
Video Interface	VGA HDMI	VGA HDMI	VGA HDMI	VGA HDMI	VGA HDMI
Audio Interface	Input and output	Input and output	Input and output	Input and output	Input and output
Brightness Control	Automatic light sensor system	Automatic light sensor system	Automatic light sensor system	Automatic light sensor system	Automatic light sensor system
Temperature Control System	Fan cooling	Fan cooling	Fan cooling	Fan cooling	Fan cooling
Operating Temperature	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C
Operating Humidity	5% to 100%	5% to 100%	5% to 100%	5% to 100%	5% to 100%
Power Supply	AC 108-115V AC 208-240V	AC 108-115V AC 208-240V	AC 108-115V AC 208-240V	AC 108-115V AC 208-240V	AC 108-115V AC 208-240V
Max Consumption	400 W	600W	900W	1300W	1400W
Waterproof Enclosure					
Protection Grade	IP55	IP55	IP55	IP55	IP55
Package Size (W*H*D)	1900*700*240	1980*765*240	2000*860*240	2100*1000*240	2200*1080*240
Gross weight	108kg	128kg	160 kg	186kg	260kg
Installation	free standing	Free standing	Free standing	Free standing	Free standing
Protection Glass	6mm AR safe glass	6mm AR safe glass	6mm AR safe glass	6mm AR safe glass	6mm AR safe glass
Optional Configurations					
Advertising Industry	Network version of embedded decoding play system				
Professional Display Industry	Embedded PC and information distribution system				
Touch Screen	IR waterproof anti-glare touch screen				

Dimensions: unit (mm)

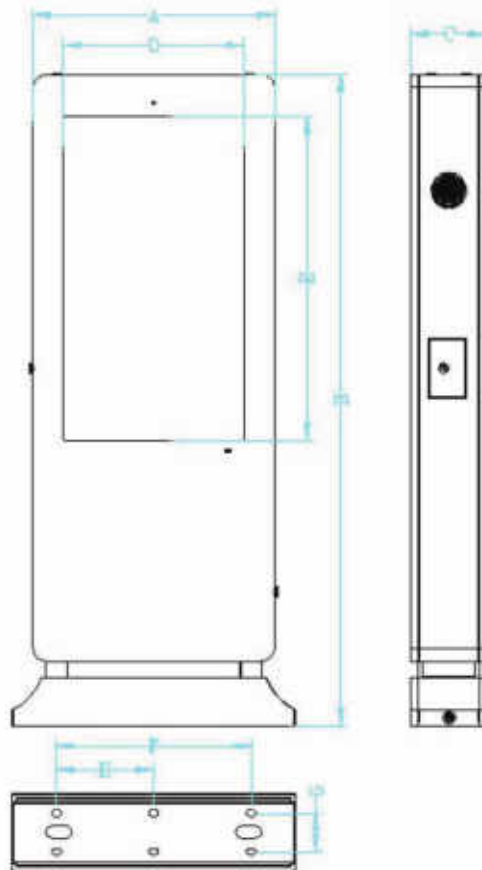

Model	A	B	C	D	E	F	G	H
FC42P01	700	1980	240	930	523	600	120	306
FC47P01	760	2050	240	1039	584	612	120	306
FC55P01	860	2160	240	1209	680	760	120	380
FC65P01	1000	2200	240	1428	803	900	120	450
FC70P01	1080	2280	240	1595	891	980	120	490

CMS TOPOLOGY

