


# FLOOR MOUNT DIGITAL KIOSK

With a wide range of Interactive & Non-Interactive Kiosk Solutions developed and fabricated by the expert designers of **Capital Infoart** in Mixed Medium are fully handcrafted for ethnic look and feel. The fascia is fabricated with printed glass in the front and mounted on wheels for elegant outlook.

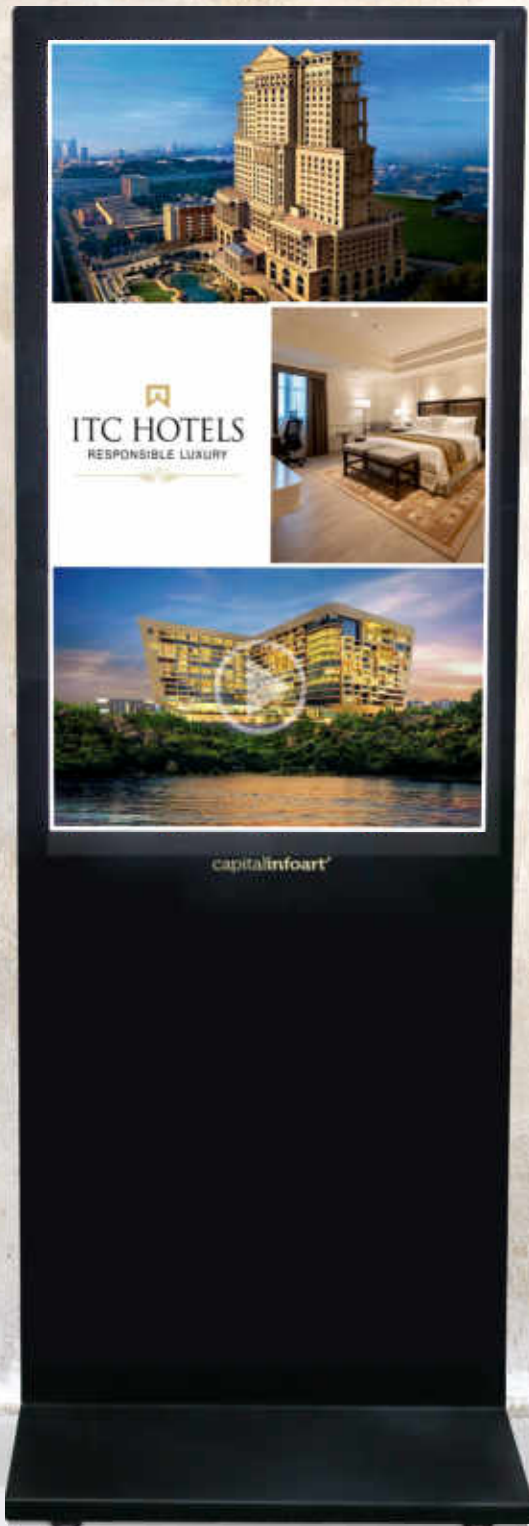

## Key Features

- **Open Android 10** and above
- **Signage** and **Third Party** Applications
- Content Management System by **LAN**
- Content Management System by **Cloud**
- **U-Disk/USB** Playback System
- Built-in **Audio**
- Slimmest digital standee with just **28 mm** thickness along with front glass fascia
- Vertical / Horizontal **split screen** available

## Application Area

Retail | Healthcare | Educational Institutions  
Hotels & Restaurants | Financial Institutions  
Entertainment Zone | Corporate Area  
Shopping Malls | Reception Area | Lounge Area

## Sizes Available

32 | 43 | 55

FLOOR MOUNT **DIGITAL KIOSK****Display Panel Specifications**

| Variable                   | 32" [K32-FL02-GSM]                   | 43" [K43-FL02-GSM]                   | 55" [K55-FL02-GSM]                   |
|----------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| Panel Size                 | 32 inch                              | 43 inch                              | 55 inch                              |
| Panel Type                 | IPS                                  | IPS                                  | IPS                                  |
| Resolution                 | 1080 x 1920                          | 1080 x 1920 / 2160 x 3840            | 1080 x 1920 / 2160 x 3840            |
| Contrast Ratio             | 1200 : 1                             | 1200 : 1                             | 1200 : 1                             |
| Viewing Angle              | 178°                                 | 178°                                 | 178°                                 |
| Luminance                  | 400 nits                             | 450 nits                             | 500 nits                             |
| Aspect Ratio               | 16 : 9   9 : 16                      | 16 : 9   9 : 16                      | 16 : 9   9 : 16                      |
| Display colors             | 16.7 M (8 bits - true) colors        | 16.7 M (8 bits - true) colors        | 1.07 G (8 bits - FRC)                |
| Display mode               | Transmission mode,<br>Normally Black | Transmission mode,<br>Normally Black | Transmission mode,<br>Normally Black |
| Active area (W x H)        | 392.8 x 698.4                        | 529.25 x 940.89                      | 680.4 x 1209.6                       |
| Operating Temperature      | 0°C - +50°C                          | 0°C - +50°C                          | 0°C - +50°C                          |
| Storage Temperature        | -20°C - +60°C                        | -20°C - +60°C                        | -20°C - +60°C                        |
| Operating Ambient Humidity | 10%RH - 80%RH                        | 10%RH - 80%RH                        | 10%RH - 80%RH                        |
| Storage Humidity           | 10%RH - 80%RH                        | 10%RH - 80%RH                        | 10%RH - 80%RH                        |

**Electrical & Physical Specifications**

| Electrical & Physical specification |                               | 32"                       | 43"                     | 55"                     |                         |
|-------------------------------------|-------------------------------|---------------------------|-------------------------|-------------------------|-------------------------|
| Input Power Supply                  | 220 V - 240 V, 1 Ph.<br>50 Hz | Dimensions<br>(W x D x H) | 470 x 47 x 1635<br>(mm) | 600 x 40 x 1750<br>(mm) | 800 x 40 x 1950<br>(mm) |
| Operating Voltage                   | 12 V DC                       | Base<br>(W x D x H)       | 485 x 450<br>(mm)       | 550 x 520<br>(mm)       | 750 x 575<br>(mm)       |
| Standby                             | 0.5 W                         | Gross Weight              | 30 kg                   | 40 kg                   | 48 kg                   |
|                                     |                               | Cabinet Material          | MS                      | MS                      | MS                      |

# FLOOR MOUNT **DIGITAL KIOSK**

## Hardware Specifications

|                                  |   |
|----------------------------------|---|
| <b>CPU</b>                       | RK 1.8 Ghz & above 64 bit high performance CPU  |
| <b>GPU</b>                       | Mail-G55/T864/T764 (Optional) high performance GPU  |
| <b>Memory</b>                    | Default 2 GB   4 GB (Optional)  |
| <b>Build-in storage capacity</b> | Default 16 GB   32 GB   |
| <b>Network</b>                   | Adaptive 10/100 mbps   100/1000 mbps Ethernet   |
| <b>Wifi</b>                      | Support 2.4G / 5G Wi-Fi, support Wi-Fi 802.11b/g/n protocols  |
| <b>Image rotation</b>            | Support manual rotation of 0 degree, 90 degree, 180 degree, 270 degree  |
| <b>Display</b>                   | TFT LCD Professional Signage Panel (Industrial Grade)<br>16.7M colours<br>8-bit colour depth<br>178 degree viewing angle<br>24 x 7 operation support<br>Ultra slim metal body |
| <b>HDMI</b>                      | HDMI (Out) / HDMI (In) optional   |
| <b>Audio</b>                     | 10W x 2 speaker   |
| <b>Power amplifier</b>           | 2 outputs (8 ohms, 10 watts dual audio amplifier output)  |
| <b>Microphone</b>                | Differential MIC input  |
| <b>Touch screen (Optional)</b>   | Support USB multi-point infrared touch, multi-point capacitive touch, multi-point nano film touch, multi-point acoustic wave touch, multi-point optical touch and more.       |
| <b>RCT</b>                       | Built-in real-time clock function   |
| <b>USB</b>                       | 2 x USB (USB 3.0)   |
| <b>Infrared</b>                  | Support infrared remote control function  |
| <b>LED</b>                       | 1* power status LED (green), 1* system LED (green / blue blinking in default)   |
| <b>Bluetooth</b>                 | Support 4.2 bluetooth   |
| <b>I/O</b>                       | Support 5 IO input and output control, can be used as key scanning control  |
| <b>Serial port</b>               | 30 pin FPC interface, Largest support 1300 w Camera   |
| <b>Power Adapter</b>             | Input : AC 100-240 V 50-60 HZ, Output : DC 12 V 1.5 A<br>(Requires surge voltage less than 18 V and ripple voltage less than 100 mV)  |


# FLOOR MOUNT DIGITAL KIOSK

## Software specifications

|   |  |
|---|--|
| <b>Operating system</b>                       | Android 10.0 & above   |
| <b>Audio</b>                                  | Mp3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP and other formats  |
| <b>Video</b>                                  | Support AVI, rm, rmvb, MKV, WMV, MOV, MP4, DAT, PMP, MPEG, MPG, FLV, ASF, TS, TP, 3GP, MPG and other formats   |
| <b>Image</b>                                  | Support various image formats such as JPG, BMP, PNG  |
| <b>System comes with application software</b> | APK Installer, Email, Calculator, Browser, Recorder, Calendar, Settings, Clock, Video Player, Search, Contacts, Gallery, Download, Camera, Music, Explorer, etc.   |
| <b>Language</b>                               | Support multi-language   |
| <b>Input method</b>                           | Standard Android Keyboard with optional third-party input method   |
| <b>System Management</b>                      | Original ecological Android system, open root permissions, and can customize product development<br>Real-time remote monitoring, system crash self-recovery, unattended 7 x 24 hours<br>Support OTA remote upgrade; support U disk upgrade<br>Support server / stand-alone mode switching<br>Support WI-Fi hotspot |
| <b>System watchdog</b>                        | Support software watchdog  |

Available sizes 32 | 43 | 55 inch

Other Floor Mount Standee

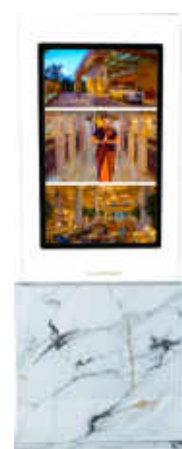

Floor Mount Glass Kiosk



Interactive Service Kiosk



A-Type Digital Standee

We are also available @

**Delhi | Ghaziabad | Varanasi | Malda  
Siliguri | Bankura | Bhubaneshwar**

Follow us on      
@PremiumGlassignage

For further correspondence # +91 97761 98155 +91 94330 01288 | mail@capitalinfoart.com  
Kolkata Corporate Office : 11/B, Chowringhee Terrace, Gokhale Road, Kolkata - 700 020 | INDIA  
Kolkata Corporate Experience Centre : 10, Chowringhee Terrace, Bhowanipore, Kolkata - 700 020 | INDIA  
Kolkata Workshop : 51A, Rashbehari Avenue, Kolkata - 700 026 | INDIA  
Kolkata Factory : G1-10/ New Belwedanga Road, Behala, Shibarampur, Kolkata - 700 141 | INDIA  
U.P. Office : 5A-70 Cloud 9 Tower, Vaishali, Sector 1, Ghaziabad, Uttar Pradesh - 201010 | #+91 9161006555 | INDIA  
Maldah Experience Centre & Office : Jyoti Complex, Rabindra Avenue, Malda 732101, West Bengal | INDIA